

锂离子电芯规格书
PRODUCT SPECIFICATION
RECHARGEABLE LITHIUM ION CELL

型号: IFR26700-40HE

Model Name: IFR26700-40HE

编制 Prepared By: Alex

审核 Checked By: 丁德峰

批准 Approved By: 沈春平

生效日期 Effective Date: 2023/04/12

江苏天鹏电源有限公司

Jiangsu Tenpower Lithium Co., Ltd

一厂地址: 中国江苏省张家港市新兴产业园区南港路

Add: Nangang Rd, Emerging industries Zone, Zhangjiagang City, Jiangsu, P.R. China

二厂地址: 中国江苏省张家港市经济技术开发区新丰东路 6 号

Add: NO.6 Xinfeng East Rd, Economic Development Zone, Zhangjiagang City, Jiangsu, P.R. China

电话 Tel: +86 512 80159961

传真 Fax: +86 512 80159936

网址 Website: www.tenpowercell.com

邮编 P.C.: 215624

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

目录 Contents

1. 范围 Scope	3
2. 型号 Model	3
3. 标称规格 Nominal Specifications	3
4. 外形尺寸（含热缩套）Outline Dimensions(with tube)	5
5. 电芯喷码 Cell Marking	5
6. 外观 Appearance	6
7. 标准测试条件和定义 Test Condition and Definitions	6
8. 电性能 Electrical Characteristics	6
9. 机械特性 Mechanical Characteristics	8
10. 安全特性 Safety	8
11. 保证 Warranty	10
12. 激活 Activation	10
13. 其他 Others	10
14. 运输 Shipping	11
正确使用和处理锂离子电池说明	12
Proper use and handling of lithium-ion batteries	12
1. 充电 Charging	12
2. 放电 Discharging	12
3. 储存 Storage	12
4. 循环 Cycle life	13
5. 电池包设计预防措施 Precautions on Battery Pack Design.	13
6. 电池组组装 Battery Pack Assembly	14
安全守则 Safety Instruction	15
[Danger!]	15
1. 电性能滥用 Electrical misuseage	15
2. 环境滥用 Environmental misuseage	15
[Warning !]	16
[Caution !]	17

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

1. 范围 Scope

本规格书描述了江苏天鹏电源有限公司生产的可充电锂离子电芯产品性能指标。

This product specification describes the performance indicators of rechargeable lithium-ion batteries produced by JIANGSU TENPOWER LITHIUM Co., Ltd.

2. 型号 Model

产品描述：电芯（可充电锂离子电芯）

Description: Cell (lithium-ion rechargeable cell)

产品型号：IFR26700-40HE

Model name: IFR26700-40HE

3. 标称规格 Nominal Specifications


项目 Item	规格 Specification
3.1. 标称容量 Nominal capacity	4000mAh （标准充电后，0.2C 放电至截止电压 2.0V） 4000mAh (the cut-off discharge at 2.0V when the discharge current is 0.2C after standard charge)0.2C *1C=4000mAh
3.2. 最小容量 Minimum capacity	3950mAh （标准充电后，0.2C 放电至截止电压 2.0V） 3950mAh (the cut-off discharge at 2.0V when the discharge current is 0.2C after standard charge)0.2C *1C=4000mAh
3.3. 内阻（mΩ） Internal Impedance at 1000 Hz	≤20（mΩ）(25±3℃)
3.4. 充电截止电压 Cut-off charging voltage	3.65V
3.5. 标称电压 Nominal voltage	3.2V
3.6. 标准充电模式 Standard charging mode	恒流恒压（恒压截止电流为 0.02C） CC-CV (cut-off current is 0.02C)
3.7. 充电电流 Charging current	标准充电：0.5C Standard charge: 0.5C
3.8. 最大（持续）放电电流 Max discharge current (continuous)	2C（25±3℃）

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

3.9. 重量 Cell weight	93.0g max.
3.10. 尺寸 Cell dimension	高度: $\leq 71.20\text{mm}$ 直径: $\leq 26.60\text{mm}$ Height : $\leq 71.20\text{mm}$ Diameter: $\leq 26.60\text{mm}$
3.11. 工作环境温度 Operating temperature (surface temperature)	充电: $0\sim 55^{\circ}\text{C}$ 放电: $-20 \sim 60^{\circ}\text{C}$ Charge : $0\sim 55^{\circ}\text{C}$ Discharge: $-20 \text{ to } 60^{\circ}\text{C}$
3.12. 储存温度 (40%~60%SOC) Storage temperature(40%~60%SOC)	1 年: $-20 \sim 25^{\circ}\text{C}$ 3 个月: $-20 \sim 45^{\circ}\text{C}$ 1 year: $-20 \text{ to } 25^{\circ}\text{C}$ 3 month : $-20 \text{ to } 45^{\circ}\text{C}$

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

4. 外形尺寸（含热缩套） Outline Dimensions(with tube)

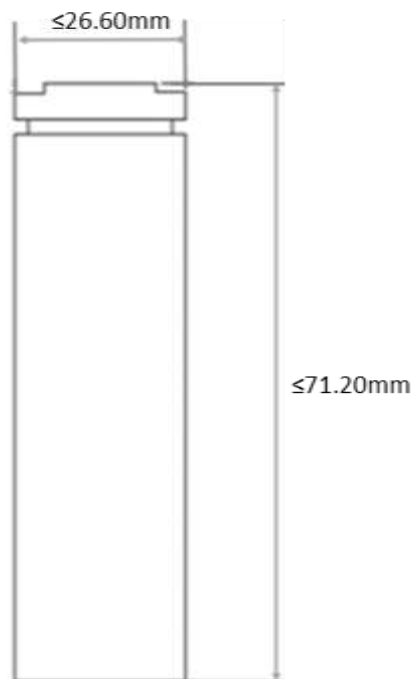

单位：毫米

Unit : mm

图 1：IFR26700-40HE 电芯的外形尺寸

Fig. 1 Outline Dimensions of IFR 26700-40HE

5. 电芯喷码 Cell Marking

标准喷码参考下图：

See below: Standard Marking



5.1 电池型号(Cell type)

IFR26700-40HE

5.2 标称电压(Nominal voltage)

3.2V

5.3 公司名称（Manufacturer Name）

TP （江苏天鹏电源有限公司的缩写）

TP （Trade name of Jiangsu Tenpower Lithium Co., Ltd）

5.4 生产日期（Date）

NB170

N: 年 2014 年，2001 年为 A，以此类推；

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

B: 月 2 月, 1 月为 A, 以此类推;
 17: 日 18 日, 使用当时日期;
 0: 备用位置, 无实际意义

N: Year 2014, 2001 as A, the following years is stated as B, C , ...;
 B: Month January as A, the consecutive month stated as B, C , ...;
 17: Day 01,02,...29,30,31
 0: Digit in reserve

5.5 追溯二维码 (Tracking number)



6. 外观 Appearance

电芯外观不存在明显的刮痕、凹坑、裂痕、锈蚀、漏液等影响电芯性能的外观不良。

There is no bad appearance such as scratches, dents, cracks, corrosion, leakage, which affect the performance of the batteries.

7. 标准测试条件和定义 Test Condition and Definitions

7.1. 测试设备 Measuring Equipment

充放电设备 Charge/Discharge Equipment

电压精度: ± 10 mV; Voltage precision: ± 10 mV;

电流精度: ± 0.2 %; Current precision: ± 0.2 %;

游标卡尺 Slide caliper

游标卡尺精度为 0.01 mm

The slide caliper should have a scale of 0.01 mm.

电压/内阻测试仪 Voltage/Impedance meter

内阻精度: ± 0.5 mOhm; Impedance precision: ± 0.5 mOhm;

电压精度: ± 2 mV; Voltage precision: ± 2 mV;

在 1kHz 交流条件下进行内阻测试。

The measurement of impedance should be operated at AC 1kHz.

7.2. 除特殊要求外, 所有测试均在标准温度 25 ± 3 °C 和标准湿度 65 ± 20 % RH 的条件下进行。测试使用电芯为交货一周内的电芯。

All the testing should be performed at temperature 25 ± 3 °C and relative humidity 65 ± 20 % unless specified. The cells used for the test should be received within one week.

7.3. 定义 Definitions:

C 倍率 (“C”) : 满电电芯 1 小时放电至终止电压所用的电流大小 (mA) 。

C Rate (“C”): 1C discharge current(mA) defined as a fully charged cell discharged to the cutoff voltage at 1 hour.

8. 电性能 Electrical Characteristics

8.1. 标准充电 Standard charge

标准充电定义为 25 ± 3 °C 下, 0.5C 恒流充电至截止电压 3.65 V, 恒压截止电流至 0.02C。

该产品规格书为江苏天鹏电源有限公司保密文件, 仅供客户内部使用。

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

The "Standard charge" means a cell charging to 4.2V with 0.5C constant current and cutoff with 0.02C under constant voltage mode at $25\pm3^{\circ}\text{C}$.

8.2. 标准放电 Standard discharge

标准放电是指 $25\pm3^{\circ}\text{C}$ 时标准充满电后，0.2C 恒流放电至截止电压 2.0V。

The "Standard discharge" means discharging current of 0.2C with 2.0V cut-off at $25\pm3^{\circ}\text{C}$ after the standard charge.

8.3. 温度与放电容量的关系 Temperature dependence of discharge capacity

不同温度下容量的对比，按如下形式测试，标准充满电后按 0.2C 恒流放电至截止电压 2.0V 所得到的容量，数据如下：

Capacity comparison at each temperature stated as below table, measured with discharge constant current 0.2C and cut off at 2.0V after standard charge, the data is as follows.

温度 Temperature	25°C	55°C
容量比率 Relative Capacity	100%	95%

备注：如果充放电温度不一致，充电后在测试的温度环境中搁置 3 小时；表中的百分比值，按 25°C 的容量作为参照比。

Note: If charge temperature and discharge temperature is not the same, the interval for temperature change is three (3) hours. Percentage as an index of the capacity at 25°C is 100%.

8.4. 倍率放电性能 Discharge rate capabilities

放电容量按如下测试，标准充电后，按照不同的电流恒流放电至截止电压 2.0V 所得到的容量。

Discharge capacity retention is measured with various current stated as below table with 2.0V cut-off voltage after the standard charge.

电流 Current	0.2C	0.5C	1C	2C
容量比率 Relative Capacity	100%	97%	95%	90%

备注：表中的百分比值，按 25°C 的容量作为参照比。

Note: Percentage as an index of the capacity at 25°C is 100%.

8.5. 循环测试 Cycle life

在 $25\pm3^{\circ}\text{C}$ 环境下，0.5C CC-CV 模式充电至 3.65V，0.05C 截止，静置 10 分钟，1C 恒流放电至截止电压 2.0V，休息 10 分钟，为一个循环。循环 2000 次后，容量 $\geq 25^{\circ}\text{C}$ 前 10 次放电容量均值的 80%。

Each cycle is an interval between the 0.5C CC-CV charge to 3.65V at $25\pm3^{\circ}\text{C}$, cut off 0.05C, rest 10 minutes, and then discharge (discharge current 1C) to 2.0V, and rest 10 minutes again. After 2000 cycles, the capacity is higher than 80% of the average discharge capacity of first 10 cycles.

8.6. 储存特性 Storage characteristics

标准充电后，在环境温度 $25\pm3^{\circ}\text{C}$ 的条件下存储 28 天， 25°C 下以 0.5C 恒流放电至截止电压 2.0V 所得的容量为剩余容量，剩余容量 $\geq 25^{\circ}\text{C}$ 下标准放电容量的 90%，室温下静置 10min；标

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

准充放电重复三次后，3次放电容量最高值为恢复容量，恢复容量 $\geq 25^{\circ}\text{C}$ 下标准放电容量的95%

Storage for 28 days at $25\pm 3^{\circ}\text{C}$ from the standard charge, measured with discharge constant current 0.5C with 2.0V cut-off at 25°C . Capacity retention (after the storage) $\geq 90\%$ of the standard discharge capacity at 25°C . rest 10min at $25\pm 3^{\circ}\text{C}$. Each cycle is an interval between the 0.5C CC-CV charge to 3.65V at $25\pm 3^{\circ}\text{C}$, cut off 0.02C, rest 10 minutes, and then discharge (discharge current 1C) to 2.0V, and rest 10 minutes again. After 3 cycles. The max recovery capacity $\geq 95\%$ of the standard discharge capacity at 25°C

8.7. 电池出厂状态 Status of the cell as of ex-factory

电池充电至开路电压 3.125~3.275V 出货。

The cell should be shipped in OCV 3.125~3.275V.

9. 机械特性 Mechanical Characteristics

测试项目 Items	判断标准 Criteria	测试方法与条件 Test Method and Condition
挤压测试 Crush test	不起火，不爆炸 No fire, no explosion	将电池单体挤至 0V 或者变形量达到 30%或挤压力达到 $(13\pm 0.78)\text{Kn}$. The battery is crushed to 0V or the deformation rate reaches 30% or the force reaches $(13\pm 0.78)\text{Kn}$.

10. 安全特性和环境适应性测试 Safety and Environment Suitability Test

测试项目 Items	判断标准 Criteria	测试方法与条件 Test Method and Condition
过充测试 Abnormal Charging Test	不着火不爆炸 No fire and no explosion	将电池按照标准方式充电后，以 1C 电流进行充电至电压达到 5.475V。测试过程中监测电芯温度变化，当电芯温度下降至室温时，结束测试。 Cell fully charged, then overcharged with 1C to 5.475V. Monitoring cell temperature during testing. Stop the test when cell temperature decays to room temperature.
过放电测试 Over-discharge Test	不着火不爆炸 No fire and no explosion	电芯按标准充电方式充完电后，以 1C 电流放电 90min After standard charge, then discharged with 1C for 90min.
短路测试 Short-Circuit Test	不着火不爆炸 No fire and no explosion	标准充电后，在 $25^{\circ}\text{C}\pm 3^{\circ}\text{C}$ 环境中用不超过 $5\text{m}\Omega$ 金属丝将单颗电池短路至电池恢复到常温。 After standard charge, short-circuit the cell at $25^{\circ}\text{C}\pm 3^{\circ}\text{C}$ until the cell temperature returns to ambient temperature.(cross section of the wire or connector should be less than $5\text{m}\Omega$).

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

低气压测试（高度模拟） Low Pressure Performance	不着火不爆炸,不漏液 No fire and no explosion, no leakage	电池按标准充电方式充电后,将电池放入低气压箱中 ,调节试验箱中气压为 11.6KPa,温度为室温,静置 6H，停止实验，观察 1h。 After standard charging, the battery is put into a low-pressure box with pressure of 11.6KPa at room temperature, kept for 6h, and observed for 1h after taken out.								
热冲击 Heating Test	不着火不爆炸 No fire and no explosion	标准充电后，电芯放置到恒温加热箱中，用热电偶连接电芯监测电芯温度。恒温箱升温加热电芯，要求恒温箱升温速度为每分钟 5±2℃。监测恒温箱温度变化,当恒温箱温度达到 130±2℃后恒温保持 10 分钟，结束测试。 After standard charge, cell is to be placed in the hot oven. Store the testing cells connecting with thermocouple in constant temperature box, heating the cells and box(speed of ascending temperature is 5°C±2°C per min) together at room temperature simultaneity, monitor the temperature change of the box, keep for 10 minutes after the box temperature reaches 130°C±2°C,then stop the test.								
自由跌落测试 Free falling (drop)	不着火不爆炸 No fire and no explosion	电池按照标准充电方式充电后，由 1.2m 高度自由跌落到水泥地面上，正负端子向下各一次，观察 1h。 After standard charging, the battery is dropped onto the cement floor from 1.2 meters, the positive and negative terminal is downward once, respectively								
温度循环测试 Temperature Cycle	不起火，不爆炸，不漏液 No fire and no explosion, no leakage	电池按照标准充电方式充电后，将电池放入温度箱中，温度箱温度按照下表进行调节，循环次数 5 次，观察 1h。 After standard charging, the battery is put into the constant temperature oven, and set up the temperature of the oven according to below table, repeating 5 times, and observed for 1h.								
<table><tr><th colspan="4">温度循环实验一个循环的温度和时间 The temperature and time of one cycle</th></tr><tr><td>温度/℃ Temperature/℃</td><td>时间增量/分钟 Increment/min</td><td>累计时间 Accumulation/min</td><td>温 度 变 化 率℃/min Temperature</td></tr></table>			温度循环实验一个循环的温度和时间 The temperature and time of one cycle				温度/℃ Temperature/℃	时间增量/分钟 Increment/min	累计时间 Accumulation/min	温 度 变 化 率℃/min Temperature
温度循环实验一个循环的温度和时间 The temperature and time of one cycle										
温度/℃ Temperature/℃	时间增量/分钟 Increment/min	累计时间 Accumulation/min	温 度 变 化 率℃/min Temperature							

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

				variation °C /min
	25	0	0	0
	-30	60	60	1
	-30	90	150	0
	25	60	210	1
	85	90	300	1
	85	110	410	0
	25	70	480	1

11. 保证 Warranty

11.1. 自出货之日起，电芯的保质期为一年。在此期限内，如果非 TENPOWER 制程原因，而是由于客户的误用造成的电芯质量问题，TENPOWER 公司不承诺免费更换。

The warranty period of a Cell is one (1) year after the delivery to the Customer. However, even though the problem occurs within this period, TENPOWER won't replace a new cell for free as long as the problem is not due to the failure of TENPOWER manufacturing process or the problem is due to Customer's abuse or misuse.

10.2 TENPOWER 公司对违反安全守则操作所产生的问题不承担任何责任。
TENPOWER will not be responsible for trouble occurred by handling outside of the precautions in safety instructions.

10.3 由包装，电路、电芯组以及充电器搭配使用所产生的问题 TENPOWER 概不负责。
TENPOWER will not be responsible for packing, trouble occurred by matching electric circuit, cell pack and charger.

10.4 收货后在电芯组装过程中产生的不良电芯 TENPOWER 不予以质量保证。
TENPOWER will be exempt from warrantee any defect cells during assembling after acceptance by the Customer.

12. 激活 Activation

电池每隔 3 个月激活电池一次，标准的激活方式为：使用标准充电方式 8.1 充电后静置 10 分钟，再使用标准放电方式 8.2 放电后静置 30 分钟，使用 0.5C 电流恒流充电 0.5 小时。如电池已被装配或已使用，须用配套的充电器和机器做激活。

Please activate the battery once every three months according to the following method:
Cell shall be charged per 8.1, rest 10mins, then be discharged per 8.2, rest 30mins. Charge the cell at constant current of 680mA for 0.5hours.

If the battery has been assembled or used, use the suitable matched charger and machines to activate.

13. 其他 Others

13.1 长期储存 Storage for a long time

如果电芯要储存三个月及以上的时间，电芯必须在干燥、低温下储存。

If the cell is kept for a long time (3 months or more), it is strongly recommended that the cell is preserved at dry and low temperature.

13.2 任何未包含在此产品规格书之内的问题，由双方协商解决。

Any matter not included in that specification should be discussed and confirmed by both parties.

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

14. 运输 Shipping

由于电芯存在自耗电，运送到客户端的电芯无法完全保证出货时的荷电量。运输过程应防止剧烈振动、冲击、日晒雨淋。

Due to the self-discharge, it is not specified more than shipping capacity remain at customer, During transportation, keep the cell from acutely vibration, impacting, solarization, drenching..

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

正确使用和处理锂离子电池说明

Proper use and handling of lithium-ion batteries

使用之前请阅读

江苏天鹏电源提供

See before using lithium-ion cell

Supplied by

Jiangsu Tenpower Lithium Co., Ltd.

1. 充电 Charging

- 1.1. 正常电芯充电上限电压设定为 3.65V 以避免过充电。充电电压高于 3.65V 会导致电芯循环寿命缩短，并会导致电池失效，严重的会出现安全问题。

Charging voltage must be set 3.65V/cell to avoid over-charging. Cell life will be shorten by charging voltage above 3.65V, leading to cell failure, serious can appear safety problems.

- 1.2. 必须使用恒压恒流方式对电芯进行充电，不可使用持续充电方式。

Cell must be charged with CC (constant current) - CV (constant voltage) method. Do not use the continuous charging method.

- 1.3. 当电芯电压低于 2.0V 时，必须使用低于 0.2C 电流对电芯进行预充电，直到电芯电压高于 2.0V 再进行标准方式充电。如果电芯电压在限定时间内无法充至 2.0V，充电器需停止充电。

When the cell voltage is below 2.0V, cell should be pre-charged lower than 0.2C current.

Only standard charging method can be switched after voltage exceed 2.0V. If the cell voltage unable to reach in specified period/time, stop charging immediately.

- 1.4. 充电器必须能够通过计时，电流检测，开路电压检测监控电芯充电状态，如检测到电芯充满电，充电器需停止充电。

The charge must have the function of timer, current detection and OCV detection to monitor the cell charging condition. If the cell is detected fully charged, charger must stop charging immediately.

2. 放电 Discharging

- 2.1. 电芯放电电流需小于规格书要求。

The discharge current of a cell must be below specified in the product specification.

- 2.2. 电芯放电终止电压需高于规格书要求。

The discharge end voltage of a cell must be over specified in the product specification.

- 2.3. 正常使用时电芯不可过放电至电压低于 1.6V。

The cell should not be over-discharged below 1.6V by using.

- 2.4. 电芯放电温度范围需按照规格书要求。

The cell should be discharged within a range of temperatures specified in the product specification.

3. 储存 Storage

- 3.1. 电芯应在干燥无腐蚀性气体的环境下储存。

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

The cell should be stored in a dry area and no corrosive gas.

3.2. 不要让电芯承受任何压力。

No pressing on the cell.

3.3. 储存温度要求 Storage temperature

储存期 3 个月 : -20°C ~ +45°C

When stored within 3 months: -20°C ~ +45°C

储存期 12 个月: -20°C ~ +25°C

When stored within 12 months : -20°C ~ +25°C

3.4. 电芯组装后, 若电池包超过 1 年未能使用, 须将电池充电到约 3.125~3.275V, 以避免电池压降过低。

After the cell assembled in pack, the pack should be recharged to 3.125~3.275V if the pack has never been used for one (1) year, prevent over low voltage.

4. 循环 Cycle life

4.1. 在超出限定温度范围进行充电或放电, 会引发电芯产热或严重的损伤, 也会造成循环寿命缩短及性能衰减。

Charge or discharge out of recommended temperature range might cause the generating heat or serious damage of cell. And also, it might cause the deterioration of cell's characteristics and cycle life.

4.2. 循环性能 Cycle life performance

按照规格书中的方法和要求进行电芯充放电, 循环数次和容量水平均可达到产品规格书中所对应的水平。

The cell can be charged/ discharged repeatedly up to times with a certain level of capacity specified in the production specification.

4.3. 电池寿命取决于充电、放电、使用温度、及储存条件。

Cycle life might be determined by conditions of charging, discharging, operating temperature and storage.

5. 电池包设计预防措施 Precautions on Battery Pack Design.

5.1. 终端外形与构造设计能够有效阻止静电及水进入电池包内部。

Highly recommended on pack design with anti-static and waterproof.

5.2. 正常使用时过充保护能够确保电芯充电电压低于 3.65V, 若电芯电压高于 3.65V 则停止充电。

Overcharge protection should work below 3.65V/cell by using. Then charge current shall be shut down.

5.3. 正常使用时过放保护能够在电芯电压达到 2.0V 时停止放电且漏电流需小于 1 μ A。

Within a voltage range of 2.0V/cell by using, over-discharge protection should work. Then discharge current shall be shut down and consumption current is below 1 μ A.

5.4. 电池包电路设计低漏电流 (例如保护电路, 电量监控等) 以避免电芯储存过程被放电。

To avoid discharging during storage, design the low consumption current electronic circuit (e.g. Protection circuit, fuel gauge, etc) inside battery pack.

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

6. 电池组组装 Battery Pack Assembly

- 6.1. 禁止使用受损电芯。不要使用由于运输损伤，跌落，短路，二次点焊或其它原因造成破损或漏液电芯。

Prohibition of usage of damaged cell. Do not use abnormal cell which has been damaged by shipping stress, drop, short, twice spot or something else, and which gives off electrolyte odor.

- 6.2. 电池组装前检查电池外包装。

The cell should be inspected visually before battery assembly.

- 6.3. 使用前需检测电芯电压及内阻。

Inspect voltage and internal impedance before using.

- 6.4. 不可使用锡焊以避免对电芯造成损伤，电池包组装使用点焊方式在电芯上连接导线及线路板。

Do not solder onto a cell in order to avoid damage on the cell. Weld spot welding lead plate onto cell, and solder lead wire or lead plate.

- 6.5. 电池组装须注意防静电，避免电子元件损伤。

The battery assembly must pay attention to anti-static, Avoid electronic components damaged by electrostatic.

- 6.6. 电池组装时须注意防止短路。

Battery assembly should pay attention to prevent the short circuit.

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

安全守则 Safety Instruction

锂离子电池如果使用不当会引起电池损坏甚至危害人身安全，使用前请仔细阅读并注意预防措施。

若顾客想了解本规格书以外的技术要求或使用条件，请与江苏天鹏电源有限公司联系相关事宜。

Abuse using of lithium ion battery may damage the cell or even harm to the human safety, please read the instruction carefully and take precaution.

If any additional technical support needed, please contact with Jiangsu Tenpower Lithium Co., Ltd.

[Danger!]

1. 电性能滥用 Electrical misuseage

1.1. 只按照规格书的说明充电或使用。

Use or charge the battery only in the stipulated application.

1.2. 使用 Lithium-ion 专用充电器。

Use the correct charger for Lithium-ion batteries.

1.3. 当把电池放入充电器中时，注意保证极性正确。

When connecting a battery pack to a charger, ensure correct polarity.

1.4. 不能对电池进行反充电。

Do not reverse charge batteries.

1.5. 当电池不使用时，不要将二次电池插在充电器上。

Do not maintain secondary batteries on charge when not in use.

2. 环境滥用 Environmental misuseage

2.1 不能将电池放入水中或海水中。

Never put a battery into water or seawater.

2.2 不能将电池投入火中。

Don't throw the battery into the fire.

2.3 不能使用或将电芯放在太阳光直射的地方（或阳光直接照射的车内）。这种情况会使得电芯产热，冒烟或起火，也可能使得电芯性能衰减及循环寿命缩短。

Do not use or leave the cell under the blazing sun (or in heated car by sunshine). The cell may generate heat, smoke or flame. And also, it might cause the deterioration of cell's characteristics or cycle life.

2.4 不能私自拆除、打开或分解电池，电池只能由专业人员拆解。多串电池组外壳须合理设计，使得专业人员只能使用工具拆解。

Do not dismantle, open or shred cells. Batteries should be dismantled only by trained personnel. Multicell battery cases should be designed so that they can be opened only with the aid of a tool.

2.5 不能直接对电池进行焊接。

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

Do not solder directly to batteries.

2.6 不能让电池处于不利环境中，比如极端的温度，深度循环，或者经常过充/过放电。

Do not subject batteries to adverse condition such as extreme temperature, deep cycling and excessive overcharge/over discharge.

2.7 不能将电池短路，也不能将电池杂乱的放在盒子或抽屉里，电池的相互接触或由于导电材料的存在易形成短路，这将永久的损坏电池。

Do not short-circuit batteries. Do not store batteries haphazardly in a box or drawer where they may short-circuit each other or be short-circuited by conductive materials, permanent damage to batteries may result.

2.8 不能燃烧或毁坏电池，可能导致有毒气体释放或爆炸。

Do not incinerate or mutilate batteries, may burst or release toxic material.

2.9 不能让电池承受机械冲击。

Do not subject batteries to mechanical shock.

[Warning !]

1.1. 在使用新电池前，或者长期存放后第一次使用电池，在使用前请将电池充满电。

When using a new battery or a battery to be used for the first time after long term storage, please fully charge the battery before using.

1.2. 禁止反向充电 Prohibition of reverse charge

正确连接电池的正负极，严禁反向充电。若电池正负极接反，应保证无法对电芯进行充电。反向充电会降低电芯的充放电性能、安全性，并会导致发热、泄漏。

Reverse charge is prohibited. Cells shall be connected correctly. The polarity has to be confirmed before wiring. If a cell is connected improperly, the cell cannot be charged. Simultaneously, the reverse charging may cause damage to the cell which may lead to degradation of cell performance and damage the cell safety, and could cause heat generation or leakage.

1.3. 不能将我公司电池与其他品牌的电池或者不同种类的电池，比如碱性锌电池混用。

Do not mix our batteries with other battery brands or batteries of a different chemistry such as alkaline and zinc carbon.

1.4. 不能将新旧电池混用，可能会导致过放电。

Do not mix new batteries in use with semi-used batteries, over-discharge may occur.

1.5. 如果出现噪音，温度异常，或者漏液，请停止使用。

If find any noise, excessive temperature or leakage from a battery, please stop its use.

1.6. 如果电池发烫，请勿触摸，直至冷却。

When the battery is hot, please do not touch it and handle it, until it has cooled down.

1.7. 不能把电池（电池组）的外套去除。

Do not remove the outer sleeve from a battery pack nor cut into its housing.

1.8. 电池使用时发现功率下降，请关闭用电器开关以防止电池过放。

When find battery power down during use, please switch off the device to avoid over discharge.

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

1.9. 电池使用后，如果电池发热，再次充电前，请在通风环境中冷却。

After using, if the battery is hot, before recharging it, allow it to cool in a well-ventilated place out of direct sunlight.

1.10. 不能尝试分离，挤压，撞击电池，电池会发热或起火。电池中的碱液对皮肤和眼睛有害，而且会损伤衣服。

Do not attempt to take batteries apart or subject them to pressure or impact. Heat may be generated or fire may result. The alkaline electrolyte is harmful to eyes and skin, and it may damage clothing upon contact.

1.11. 不能将电池放入水中或海水中。

Never put a battery into water or seawater.

1.12. 要使电池远离儿童。如发现吞食，立即联系医生。

Keep the battery away from babies and children. If swallowed, see a doctor immediately.

1.13. 电池泄漏时，液体不能接触皮肤和眼睛。一旦接触，立即用大量的水冲洗患处，并及时就医。

In the event of a cell leaking, do not allow the liquid to come into contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.

[Caution !]

1.1. 当电池不使用时，请把它从装置上取下。

When not using a battery, disconnect it from the device.

1.2. 取下电池组时，用手抓住插头而不是拉线。

Unplug a battery by holding the connector itself and not by pulling at its cord.

1.3. 废弃电池应交予有相关资质的处理单位处置。

Used batteries should be treated by authorized units.

1.4. 长时间存储后，为了保证电池的最高效能，电池需要做数次充放电激活。

After extended periods of storage, it may be necessary to charge and discharge the batteries several times to obtain maximum performance.

1.5. 二次电池在室温下使用可以发挥出最好性能。

Secondary batteries give their best performance when they are operated at normal room temperature.

1.6. 电池保持清洁、干燥。

Keep batteries clean and dry.

1.7. 如果电池表面有污渍，用干燥整洁的布擦拭。

Wipe the battery terminals with a clean dry cloth if they become dirty.

1.8. 二次电池处理时，请将电池和其他电化学体系的产品分开。

When disposing of secondary batteries, keep batteries of different electrochemical systems separate from each other.

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

联系方式

Contact information

如有任何有关电芯或应用方面的技术疑问和咨询，请按以下地址联系：

If you have any questions regarding the cell and application, please contact the following address:

江苏天鹏电源有限公司

Jiangsu Tenpower Lithium Co., Ltd

一厂地址：中国江苏省张家港市新兴产业园区南港路

Add: Nangang Rd, Emerging industries Zone, Zhangjiagang City, Jiangsu, P.R. China

二厂地址：中国江苏省张家港市经济技术开发区新丰东路 6 号

Add: NO.6 Xinfeng East Rd, Economic Development Zone, Zhangjiagang City, Jiangsu, P.R. China

电话 Tel: +86 512 80159961

传真 Fax: +86 512 80159936

网址 Website: www.tenpowercell.com

邮编 P.C.: 215624

规格书 Spec. No.	IFR26700-40HE	版本号 Version No.	V 0.2
------------------	---------------	--------------------	-------

文件修订记录表(HISTORY RECORD)

修订日期 (Date)	版次 (Rev.)	修订说明 (Revision Statement)	
		旧版内容 (Old)	新版内容 (New)
22/08/16 22/11/06 23/04/12	Draft V0.1 V0.2	Capacity@-10℃ ≥65%	Initial Version 更新喷码说明 移除-10℃低温规格