


## Performance Data

(Typical values for batteries stored at +25 °C for one year)


|                                   |                          |
|-----------------------------------|--------------------------|
| System                            | Lithium Thionyl Chloride |
| Nominal voltage                   | 3.6 V                    |
| Nominal capacity                  | 1.5 Ah                   |
| Nominal current                   | 1.3 mA                   |
| Max. continuous discharge current | 75 mA                    |
| Pulse current capability          | 150 mA                   |
| Anode surface area                | 9 cm <sup>2</sup>        |
| Lithium content                   | 0.5 g                    |
| Weight                            | 12.5 g                   |
| Volume                            | 5.2 cm <sup>3</sup>      |
| Temperature range                 | -55 °C ... +85 °C        |




### SL-761/S

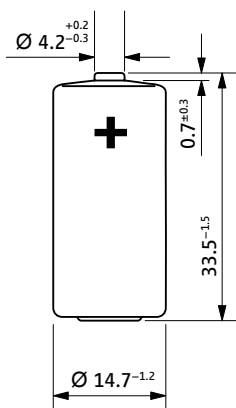


### SL-761/T




### SL-761/P

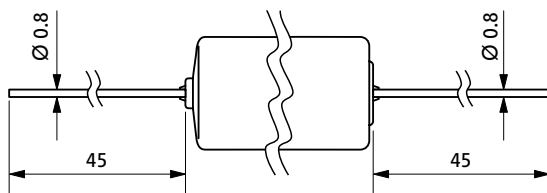

### SL-761/PR



### SL-761/PT



## Available Terminations


|           |                |               |
|-----------|----------------|---------------|
| SL-761/S  | Standard       | 11 1 07611 00 |
| SL-761/T  | Tags           | 11 1 07612 00 |
| SL-761/P  | Pins           | 11 1 07613 00 |
| SL-761/PR | Pins radial    | 11 1 07616 00 |
| SL-761/PT | Polarized tags | 11 1 07618 00 |

## Catalogue No.




**WARNING:**  
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


## Typical Discharge Curves at +25 °C

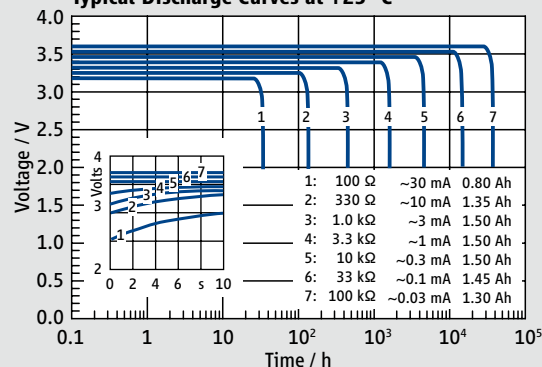

## Available Capacity

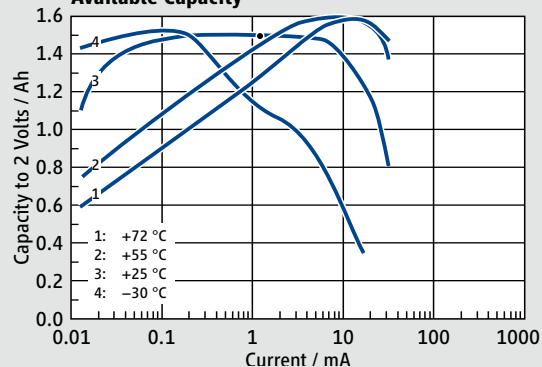

## Operating Voltage

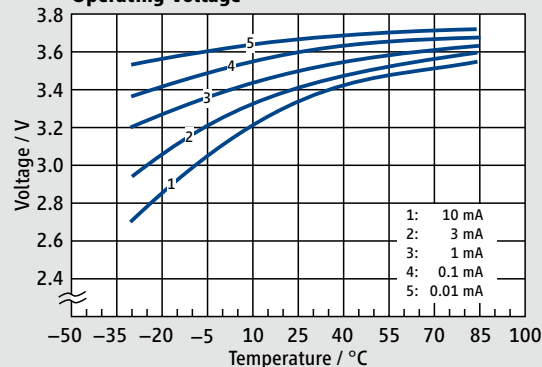

## Voltage Response at +25 °C, Pulse: 15 mA

